


# Bifolding door



The insulated Bi-folding Door is ideal for opening up to 4.5 metres wide x 4.5 metres high, suitable for industrial and commercial applications. These doors are especially suitable for low headroom application requiring only 200mm.

Each panel can be fabricated to a width of 1200mm and are finished in a wide range of Plastisol or painted RAL colours. These doors are supported by a top hanging system and guided at the bottom.

- FAAC 560 240v electric motor
- Safety photo beams
- Safety edges
- Remote push buttons
- Remote control
- Induction loop
- Radar activation
- Manual override
- Traffic lights
- Vision panels
- Shoot bolts
- Audio warning

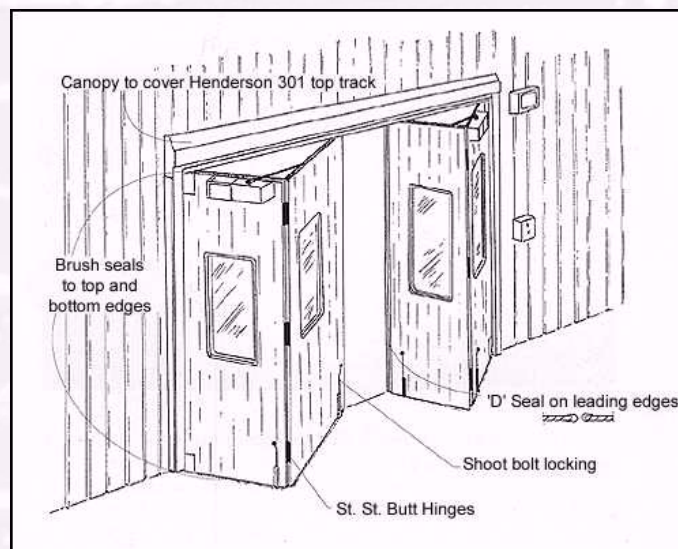

**BI-FOLD ROLFE LTD**  
*Industrial Door Specialist*

UNIT 4, CALCOT MOUNT, CALCOT LANE, CURDRIDGE, HAMPSHIRE SO32 2BN  
Tel: (01489) 780099 Fax: (01489) 780090  
E-Mail: [sales@bifoldrolfe.com](mailto:sales@bifoldrolfe.com) [www.bifoldrolfe.com](http://www.bifoldrolfe.com)